
Central Valley Regional Water Quality Control Board

29 December 2020

Sean Poirier
Pacific Gas and Electric Company
4040 West Lane, Building #9 (113C)
Stockton, CA 95204
sean.poirier@pge.com

CLEAN WATER ACT SECTION 401 TECHNICALLY CONDITIONED WATER QUALITY CERTIFICATION; PACIFIC GAS AND ELECTRIC, PG&E R-687 L-215 SAN JOAQUIN RIVER CROSSING REPLACEMENT PROJECT (WDID#5B50CR00100), SAN JOAQUIN COUNTY

This Order responds to the 13 August 2020 application submitted by Pacific Gas and Electric (Applicant) for the Water Quality Certification of the PG&E R-687 L-215 San Joaquin River Crossing Replacement Project (Project), temporarily impacting 0.44 acre of waters of the United States.

This Order serves as certification of the United States Army Corps of Engineers' Nationwide Permit #12 under Section 401 of the Clean Water Act, and a Waste Discharge Requirement under the Porter-Cologne Water Quality Control Act and State Water Board Order 2003-0017-DWQ.

WATER QUALITY CERTIFICATION STANDARD CONDITIONS:

- 1. This Water Quality Certification (Certification) is not valid until coverage under Section 404 of the Clean Water Act is obtained. If the Project, including the area of impact (as described) is modified through this process, this Certification will not be valid until amended by the Central Valley Regional Water Quality Control Board (Central Valley Water Board).**
2. This Order serves as a Water Quality Certification (Certification) action that is subject to modification or revocation upon administrative or judicial review, including review and amendment pursuant to Section 13330 of the California Water Code and Section 3867 of the California Code of Regulations.
3. This Certification action is not intended and shall not be construed to apply to any discharge from any activity involving a hydroelectric facility requiring a Federal Energy Regulatory Commission (FERC) license or an amendment to a FERC license unless the pertinent Certification application was filed pursuant to Section 3855(b) of the California Code of Regulations, and the application specifically

identified that a FERC license or amendment to a FERC license for a hydroelectric facility was being sought.

4. The validity of any non-denial Certification action shall be conditioned upon total payment of the full fee required under Section 3860(c) of the California Code of Regulations.
5. This Certification is no longer valid if the Project (as described) is modified, or coverage under Section 404 of the Clean Water Act has expired.
6. All reports, notices, or other documents required by this Certification or requested by the Central Valley Water Board shall be signed by a person described below or by a duly authorized representative of that person.
 - (a) For a corporation: by a responsible corporate officer such as: 1) a president, secretary, treasurer, or vice president of the corporation in charge of a principal business function; 2) any other person who performs similar policy or decision-making functions for the corporation; or 3) the manager of one or more manufacturing, production, or operating facilities if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.
 - (b) For a partnership or sole proprietorship: by a general partner or the proprietor.
 - (c) For a municipality, state, federal, or other public agency: by either a principal executive officer or ranking elected official.
7. Any person signing a document under Standard Condition number 6 shall make the following certification:

“I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.”

TECHNICAL CERTIFICATION CONDITIONS:

In addition to the above standard conditions, the Applicant shall satisfy the following:

1. The Applicant shall notify the Central Valley Water Board in writing seven (7) days in advance of the start of any work within waters of the United States.

2. Except for activities permitted by the United States Army Corps of Engineers under Section 404 of the Clean Water Act, soil, silt, or other organic materials shall not be placed where such materials could pass into surface water or surface water drainage courses.

Except for activities permitted by the United States Army Corps of Engineers under Section 10 of the Rivers and Harbors Act, soil, silt, or other organic materials shall not be placed where such materials could pass into surface water or surface water drainage courses.

3. The Applicant shall maintain a copy of this Certification and supporting documentation (Project Information Sheet) at the Project site during construction for review by site personnel and agencies. All personnel (employees, contractors, and subcontractors) performing work on the proposed Project shall be adequately informed and trained regarding the conditions of this Certification.
4. The Applicant shall perform surface water sampling:
 - a) when performing any in-water work;
 - b) in the event that Project activities result in any materials reaching surface waters; or
 - c) when any activities result in the creation of a visible plume in surface waters.

The sampling requirements in Table 1 shall be conducted upstream out of the influence of the Project, and 300 feet downstream of the work area. The sampling frequency may be modified for certain projects with written approval from Central Valley Water Board staff.

The sampling requirements in Table 1 shall be conducted by taking a sample of the ambient conditions before work begins in the work area, and sampling during work in the work area. The sampling frequency may be modified for certain projects with written approval from Central Valley Water Board staff.

Table 1: Sample Type and Frequency Requirements

Parameter	Unit	Type of Sample	Minimum Sampling Frequency	Required Analytical Test Method
Turbidity	NTU	Grab ¹	Every 4 hours during in-water work	2, 3
Visible construction related pollutants ⁴	Observations	Visual Inspections	Continuous throughout the construction period	NA

Surface water sampling shall occur at mid-depth. A surface water monitoring report shall be submitted within two weeks of initiation of in-water construction, and every two weeks thereafter. In reporting the sampling data, the Applicant shall arrange the data in tabular form so that the sampling locations, date, constituents, and concentrations are readily discernible. The data shall be summarized in such a manner to illustrate clearly whether the Project complies with Certification requirements. The report shall include surface water sampling results, visual observations, and identification of the turbidity increase in the receiving water applicable to the natural turbidity conditions specified in the turbidity criteria below.

If no sampling is required, the Applicant shall submit a written statement stating, “No sampling was required” within two weeks of initiation of in-water construction, and every two weeks thereafter.

5. The Central Valley Water Board adopted a *Water Quality Control Plan for the Sacramento River and San Joaquin River Basins*, Fifth Edition, revised May 2018 (Basin Plan) that designates beneficial uses, establishes water quality objectives, and contains implementation programs and policies to achieve those objectives for all waters addressed through the plan. Turbidity limits are based on water quality objectives contained in the Basin Plan and are part of this Certification as follows:

¹ Grab samples shall not be collected at the same time each day to get a complete representation of variations in the receiving water.

² Pollutants shall be analyzed using the analytical methods described in 40 Code of Federal Regulations Part 136, where no methods are specified for a given pollutant, the method shall be approved by Central Valley Water Board staff.

³ A hand-held field meter may be used, provided the meter utilizes a USEPA-approved algorithm/method and is calibrated and maintained in accordance with the manufacturer’s instructions. A calibration and maintenance log for each meter used for monitoring shall be maintained onsite.

⁴ Visible construction-related pollutants include oil, grease, foam, fuel, petroleum products, and construction-related, excavated, organic or earthen materials.

- a) Waters shall not contain oils, greases, waxes, or other materials in concentrations that cause nuisance, result in a visible film or coating on the surface of the water or on objects in the water, or otherwise adversely affect beneficial uses.
- b) Activities shall not cause turbidity increases in surface water to exceed:
 - i. where natural turbidity is less than 1 Nephelometric Turbidity Units (NTUs), controllable factors shall not cause downstream turbidity to exceed 2 NTUs;
 - ii. where natural turbidity is between 1 and 5 NTUs, increases shall not exceed 1 NTU;
 - iii. where natural turbidity is between 5 and 50 NTUs, increases shall not exceed 20 percent;
 - iv. where natural turbidity is between 50 and 100 NTUs, increases shall not exceed 10 NTUs; and
 - v. where natural turbidity is greater than 100 NTUs, increases shall not exceed 10 percent.

In determining compliance with the above limits, appropriate averaging periods may be applied provided that beneficial uses will be fully protected. Averaging periods may only be used with prior permission of the Central Valley Water Board Executive Officer.

6. The Applicant shall notify the Central Valley Water Board immediately if the above criteria for turbidity or other water quality objectives are exceeded.
7. In-water work shall occur during periods of no precipitation when the work area is naturally dry or after the work area has been completely dewatered.

The Applicant shall perform surface water sampling in accordance with Technical Certification Condition No. 4, if any of the following conditions occur: 1) in-water work is conducted during an unanticipated flow event; 2) Project activities result in any materials reaching surface waters; or 3) Project activities result in the creation of a visible plume in surface waters.

8. Activities shall not cause visible oil, grease, or foam in the receiving water.
9. Refueling of equipment within the floodplain or within 300 feet of the waterway is prohibited. If critical equipment must be refueled within 300 feet of the waterway, spill prevention and countermeasures must be implemented to avoid spills. Refueling areas shall be provided with secondary containment including drip pans and/or placement of absorbent material. No hazardous materials, pesticides, fuels, lubricants, oils, hydraulic fluids, or other construction-related potentially hazardous substances should be stored within a floodplain or within 300 feet of a waterway. The Applicant must perform frequent inspections of construction equipment prior to

utilizing it near surface waters to ensure leaks from the equipment are not occurring and are not a threat to water quality.

10. The Applicant shall develop and maintain onsite a project-specific Spill Prevention, Containment and Cleanup Plan outlining the practices to prevent, minimize, and/or clean up potential spills during construction of the Project. The Plan must detail the Project elements, construction equipment types and location, access and staging and construction sequence.
11. Raw cement, concrete (or washing thereof), asphalt, drilling fluids, lubricants, paints, coating material, oil, petroleum products, or any other substances which could be hazardous to fish and wildlife resulting from or disturbed by project-related activities, shall be prevented from contaminating the soil and/or entering waters of the United States
12. The discharge of petroleum products, any construction materials, hazardous materials, pesticides, fuels, lubricants, oils, hydraulic fluids, raw cement, concrete, asphalt, paint, coating material, drilling fluids, or other construction-related potentially hazardous substances to surface water and/or soil is prohibited. In the event of a prohibited discharge, the Applicant shall notify the Central Valley Water Board Contact within 24-hours of the discharge.
13. Discharge of unset cement, concrete, grout, damaged concrete spoils, or water that has contacted uncured concrete or cement, or related washout to surface waters, ground waters, or land is prohibited. If concrete washout is necessary at a site, washout containment to prevent any discharge shall be used. Wastewater may only be disposed by delivery to a sanitary waste water collection system/facility (with authorization from the facility's owner or operator) or a properly licensed disposal or reuse facility.
14. Creosote-treated wood products or any other treated wood products that are highly flammable and/or toxic to aquatic life shall not be installed in waters of the United States.
15. A method of containment must be used below the bridge(s), boardwalk(s), temporary crossing(s) to prevent debris from falling into the water body through the entire duration of the Project.
16. If installation or relocation of utility lines is anticipated, the Applicant shall develop a Utility Work Plan prior to commencement of dry and wet utility construction. The Utility Work Plan must cover all phases of the certified project that will impact waters of the United States and shall be consistent with this Certification.

The Utility Work Plan shall include the types of dry and wet utilities to be removed and installed, method and duration of activities, structure configuration, construction materials, equipment, erosion and sediment controls, and a map or drawing

indicating the location(s) of utility work, as related to any water of the United States, in the Project area.

Should the methodology for utility work include directional drilling, the Utility Work Plan shall incorporate a Directional Drilling Plan to address potential frac-outs. The Directional Drilling Plan shall include, but not be limited to, a description of directional drilling activities, dry and wet utility routes, crossing locations and methods, and other geotechnical considerations (i.e., surficial overburden deposits, clays and shales, bedrock formations, hydrogeology), and a reporting procedure should any level of discharge from a frac-out occur, regardless of the discharge size.

The Directional Drilling Plan must be stamped by a California Registered Geologist or Engineer.

The Utility Work Plan and Directional Drilling Plan must be made available to Central Valley Water Board staff upon request.

17. Silt fencing, straw wattles, or other effective management practices must be used along the construction zone to minimize soil or sediment along the embankments from migrating into the waters of the United States through the entire duration of the Project.
18. The use of netting material (e.g., monofilament-based erosion blankets) that could trap aquatic dependent wildlife is prohibited within the Project area.
19. All areas disturbed by Project activities shall be protected from washout and erosion.
20. All temporarily affected areas shall be restored to pre-construction contours and conditions upon completion of construction activities.
21. Hydroseeding shall be performed with California native seed mix.
22. The Applicant shall submit to the Central Valley Water Board a plan for restoration of temporary impact areas prior to the initiation of any construction activities within waters of the United States. This plan shall include the following information:
 - a) A description of and drawings showing the existing contours and existing vegetation of the temporary impact area(s). This information shall include site photographs taken of the temporary impact area(s). For linear projects, these photographs shall be taken from the alignment, in both directions and taken every 50 feet within waters of the United States for the length of the temporary impact area(s).
 - b) The methods used to restore the site to its original contour and conditions, as well as a plan for the re-vegetation of the site following construction activities.
 - c) The proposed schedule for the restoration activities.

The Applicant shall submit to the Central Valley Water Board a report that describes the restoration activities and includes photographs of the restored areas within 90

days following completion of restoration activities. The camera position and view angles of post-construction photographs shall be identical to pre-construction photographs.

23. All materials resulting from the Project shall be removed from the site and disposed of properly.
24. This Certification does not allow permanent water diversion of flow from the receiving water. This Certification is invalid if any water is permanently diverted as a part of the project.
25. If water is present, the area must be dewatered prior to the start of work.
26. If temporary surface water diversions and/or dewatering are anticipated, the Applicant shall develop and maintain on-site a Surface Water Diversion and/or Dewatering Plan(s). The Plan(s) must be developed prior to initiation of any water diversions. The Plan(s) shall include the proposed method and duration of diversion activities. The Plan(s) must be consistent with this Certification and must be made available to the Central Valley Water Board staff upon request.
27. When work in a flowing stream is unavoidable and any temporary dam or other artificial obstruction is being constructed, maintained, or placed in operation, sufficient water shall at all times be allowed to pass downstream, to maintain beneficial uses of waters of the state below the dam. Construction, dewatering, and removal of temporary cofferdams shall not violate Technical Certification Condition 5 of this Certification.
28. If any temporary dam or other artificial obstruction is constructed, the temporary dam or other artificial obstruction shall only be built from clean materials such as sandbags, gravel bags, water dams, or clean/washed gravel which will cause little or no siltation. Stream flow shall be temporarily diverted using gravity flow through temporary culverts/pipes or pumped around the work site with the use of hoses.
29. The Applicant shall apply for a name change or amendment to this Certification should any of the following occur: a) a change in the ownership of all or any portion of the Project; b) any change in the Project description; c) any change involving discharge amounts, temporary impacts, or permanent impacts; or d) amendments, modifications, revisions, extensions, or changes to the United States Army Corps of Engineers' Nationwide Permit #12, the National Marine Fisheries Service decision document(s), or the California Department of Fish and Wildlife Streambed Alteration Agreement.
30. The Applicant shall submit a copy of the final, signed and dated Lake or Streambed Alteration Agreement to the Central Valley Water Board Contact within 14 days of issuance by the California Department of Fish and Wildlife. The Applicant shall

comply with all California Department of Fish and Wildlife requirements, including those requirements described in the Lake or Streambed Alteration Agreement.

31. If Valley elderberry longhorn beetle are discovered within the Project area, the Applicant shall implement the United States Fish and Wildlife Conservation Guidelines for the Valley Elderberry Longhorn Beetle dated 9 July 1999.
32. The Applicant shall comply with all National Marine Fisheries Service requirements, including, but not limited to those requirements described in the Biological Opinion.
33. If the Project will involve land disturbance activities of one or more acres, or where the Project disturbs less than one acre but is part of a larger common plan of development that in total disturbs one or more acres, the Applicant shall obtain coverage under the National Pollutant Discharge Elimination System (NPDES) General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities Order No. 2009-0009-DWQ for discharges to surface waters comprised of storm water associated with construction activity.
34. If dewatering activities result in groundwater discharges into surface water, the Applicant shall work with the Central Valley Water Board to obtain coverage under an NPDES permit.
35. The Applicant shall work with the Central Valley Water to obtain coverage under Waste Discharge Requirements (WDRs) for dewatering activities that result in discharges to land.

If dewatering activities result in discharges to land, the Applicant shall work with the Central Valley Water Board to obtain coverage under Waste Discharge Requirements (WDRs).
36. The Conditions in this Certification are based on the information in the attached "Project Information Sheet" and the application package. If the actual project, as described in the attached Project Information Sheet and application package, is modified or changed, this Certification is no longer valid until amended by the Central Valley Water Board.
37. The Applicant shall implement each of the mitigation measures specified in the approved Mitigated Negative Declaration for the Project, as they pertain to biology, hydrology and water quality impacts as required by Section 21081.6 of the Public Resource Code and Section 15097 of the California Code of Regulations.
38. In the event of any violation or threatened violation of the conditions of this Certification, the violation or threatened violation shall be subject to any remedies, penalties, process, or sanctions as provided for under state and federal law. The applicability of any state law authorizing remedies, penalties, process, or sanctions

for the violation or threatened violation constitutes a limitation necessary to ensure compliance with this Certification.

- (a) If the Applicant or a duly authorized representative of the Project fails or refuses to furnish technical or monitoring reports, as required under this Certification, or falsifies any information provided in the monitoring reports, the applicant is subject to civil liability, for each day of violation, and/or criminal liability.
- (b) In response to a suspected violation of any condition of this Certification, the Central Valley Water Board may require the Applicant to furnish, under penalty of perjury, any technical or monitoring reports the Central Valley Water Board deems appropriate, provided that the burden, including cost of the reports, shall be in reasonable relationship to the need for the reports and the benefits to be obtained from the reports.
- (c) The Applicant shall allow the staff of the Central Valley Water Board, or an authorized representative(s), upon the presentation of credentials and other documents, as may be required by law, to enter the Project premises for inspection, including taking photographs and securing copies of project-related records, for the purpose of assuring compliance with this Certification and determining the ecological success of the Project.

NOTIFICATIONS AND REPORTS:

39. The Applicant shall provide a Notice of Completion (NOC) no later than 30 days after the Project completion. The NOC shall demonstrate that the Project has been carried out in accordance with the Project description in the Certification and in any approved amendments. The NOC shall include a map of the Project location(s), including final boundaries of any on-site restoration area(s), if appropriate, and representative pre and post construction photographs. Each photograph shall include a descriptive title, date taken, photographic site, and photographic orientation.
40. The Applicant shall submit all notifications, submissions, materials, data, correspondence, and reports in a searchable Portable Document Format (PDF). Documents less than 50 MB must be emailed to: centralvalleysacramento@waterboards.ca.gov. In the subject line of the email, include the Central Valley Water Board Contact, Project name, and WDID number as shown in the subject line above. Documents that are 50 MB or larger must be transferred to a disk and mailed to the Central Valley Water Board Contact.

STORM WATER QUALITY CONDITIONS:

The Applicant shall also satisfy the following additional storm water quality conditions:

41. During the construction phase, the Applicant must employ strategies to minimize erosion and the introduction of pollutants into storm water runoff. These strategies must include the following:

- a) the Storm Water Pollution Prevention Plan must be prepared during the Project planning and design phases and implemented, as appropriate, before construction; and
- b) an effective combination of erosion and sediment control Best Management Practices (BMPs) must be implemented and adequately working prior to the rainy season and during all phases of construction.

CENTRAL VALLEY WATER BOARD CONTACT:

Nicholas White
Central Valley Regional Water Quality Control Board
11020 Sun Center Drive, Suite 200
Rancho Cordova, CA 95670-8114
Nicholas.White@waterboards.ca.gov
(916) 464-4856

CALIFORNIA ENVIRONMENTAL QUALITY ACT:

Pacific Gas and Electric Company is the Lead Agency responsible for compliance with the California Environmental Quality Act for the PG&E R-687 L-215 San Joaquin River Crossing Replacement Project pursuant to Section 21000 et seq. of the Public Resources Code. Pacific Gas and Electric Company approved the Mitigated Negative Declaration on 23 June 2020. Pacific Gas and Electric Company filed a Notice of Determination with the State Clearinghouse on 24 June 2020 (SCH No. 2020040266).

The Central Valley Water Board is a responsible agency for the project. The Central Valley Water Board has determined that the Mitigated Negative Declaration is in accordance with the requirements of the California Environmental Quality Act.

The Central Valley Water Board has reviewed and evaluated the impacts to water quality identified in the Mitigated Negative Declaration. The mitigation measures discussed in the Mitigated Negative Declaration to minimize project impacts to State waters are required by this Certification.

With regard to the remaining impacts identified in Mitigated Negative Declaration, the corresponding mitigation measures proposed are within the responsibility and jurisdiction of other public agencies.

WATER QUALITY CERTIFICATION:

I hereby issue an Order certifying that any discharge from the Pacific Gas and Electric Company, PG&E R-687 L-215 San Joaquin River Crossing Replacement Project (WDID#5B50CR00100) will comply with the applicable provisions of Section 301 ("Effluent Limitations"), Section 302 ("Water Quality Related Effluent Limitations"), Section 303 ("Water Quality Standards and Implementation Plans"), Section 306 ("National Standards of Performance"), and Section 307 ("Toxic and Pretreatment Effluent Standards") of the Clean Water Act. Through this Order, this discharge is also regulated under State Water Resources Control Board Water Quality Order No. 2003-0017 DWQ "Statewide General Waste Discharge Requirements For Dredged Or Fill Discharges That Have Received State Water Quality Certification (General WDRs)".

Except insofar as may be modified by any preceding conditions, all Certification actions are contingent on: a) the discharge being limited and all proposed mitigation being completed in compliance with the conditions of this Certification, Pacific Gas and Electric Company's application package, and the attached Project Information Sheet; and b) compliance with all applicable requirements of the *Water Quality Control Plan for the Sacramento River and San Joaquin River Basins*, Fifth Edition, revised May 2018.

Any person aggrieved by this action may petition the State Water Resources Control Board to review the action in accordance with California Water Code Section 13320 and California Code of Regulations, Title 23, Section 2050 and following. The State Water Resources Control Board must receive the petition by 5:00 p.m., 30 days after the date of this action, except that if the thirtieth day following the date of this action falls on a Saturday, Sunday, or state holiday, the petition must be received by the State Water Resources Control Board by 5:00 p.m. on the next business day. Copies of the law and regulations applicable to filing petitions may be found on the State Water Resources Control Board's [Water Quality Petitions webpage](http://www.waterboards.ca.gov/public_notices/petitions/water_quality) (http://www.waterboards.ca.gov/public_notices/petitions/water_quality) or will be provided upon request.

Original Signed By James Marshall for:

Patrick Pulupa
Executive Officer

Enclosure: Project Information Sheet

Attachments: Figure 1 – Project Location Map
Figure 2 – Site Impacts Map

cc: Distribution List, page 17

PROJECT INFORMATION SHEET

Application Date: 13 August 2020

Applicant: Sean Poirer
Pacific Gas and Electric Company
4040 West Lane, Building #9 (113C)
Stockton, CA 95204

Project Name: PG&E R-687 L-215 San Joaquin River Crossing Replacement Project

Application Number: WDID#5B50CR00100

Date on Public Notice: 4 December 2020

Date Application Deemed Complete: 12 July 2020

Date All Information Received: 20 August 2020

Type of Project: Transportation – Bridges, Overpasses, and Crossings

Approved Months of Project Implementation: 1 July 2021 through 30 September 2021

Project Location: Section 35 and 36 Township 5 South, Range 8 East, MDB&M.
Section 31, Township 5 South, Range 9 East, MDB&M.
Section 1 and 6, Township 6 South, Range 8 East, MDB&M.
Latitude: 37.454963° N and Longitude: 121.04105° W

County: Stanislaus County

Receiving Water(s) (hydrologic unit): San Joaquin River, Sacramento/San Joaquin Hydrologic Basin, San Joaquin River Floor Hydrologic Unit #535.50, Turlock HA

Water Body Type: Wetland, Streambed, Riparian

Designated Beneficial Uses: The *Water Quality Control Plan for the Sacramento River and San Joaquin River Basins*, Fifth Edition, revised May 2018 (Basin Plan) has designated beneficial uses for surface and ground waters within the region. Beneficial uses that could be impacted by the project include, but are not limited to: Municipal and Domestic Water Supply (MUN); Agricultural Supply (AGR); Industrial Supply (IND); Hydropower Generation (POW); Groundwater Recharge (GWR); Water Contact Recreation (REC-1); Non-Contact Water Recreation (REC-2); Warm Freshwater Habitat (WARM); Cold Freshwater Habitat (COLD); Preservation of Biological Habitats of Special Significance (BIOL); Rare, Threatened, or Endangered Species (RARE); Migration of Aquatic Organisms (MIGR); Spawning, Reproduction, and/or Early Development (SPWN); and Wildlife Habitat (WILD). A comprehensive and specific list of

the beneficial uses applicable for the project area can be found on the Central Valley Water Board's [Basin Planning webpage](http://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/index.shtml) (http://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/index.shtml).

303(d) List of Water Quality Limited Segments: The San Joaquin River is the receiving water for the PG&E R-687 L-215 San Joaquin River Crossing Replacement Project. The San Joaquin River (Merced River to Tuolumne River) is on the 303(d) list for alpha-BHC (Benzenehexachloride), chlorpyrifos, DDE, DDT, diazinon, electrical conductivity, group A pesticides, mercury, specific conductivity, temperature, total dissolved solids, and toxicity. This project, as conditioned with mitigation measures to prevent transport of sediment due to project activities, will minimize impacts to . The most recent list of approved water quality limited segments is found on the State Water Resources Control Board's [Impaired Water Bodies webpage](http://www.waterboards.ca.gov/water_issues/programs/tmdl/integrated2010.shtml) (http://www.waterboards.ca.gov/water_issues/programs/tmdl/integrated2010.shtml).

Project Description: The PG&E R-687 L-215 San Joaquin River Crossing Replacement Project (Project) is located approximately 4 miles southeast of Patterson, adjacent to and crossing the San Joaquin River, in Stanislaus County. The Project is required for PG&E to comply with Federal Pipeline Safety Regulations that require the operator to correct potentially hazardous conditions. The 9.47-acre Project consists of decommissioning the 2,800 linear-foot-long L-215 pipeline. The process includes pigging and flushing the pipeline to remove potential contaminants, filling specific pipeline segments with concrete slurry, and removing 800 feet of pipeline segments, including the river crossing.

No dewatering will occur within the Project area. Work will be performed when the work area is naturally dry during periods of no precipitation. No wet concrete will be placed into stream channel, riparian, or wetland habitat. The Project will temporarily impact 0.44 acre of waters of the United States.

Preliminary Water Quality Concerns: Construction activities may impact surface waters with increased turbidity.

Proposed Mitigation to Address Concerns: The Applicant will implement Best Management Practices to control sedimentation and erosion. This Certification requires all work to be conducted during periods of no flow. In the event that project activities result in any materials reaching surface waters or unanticipated in-water work occurs, the Applicant will conduct turbidity testing. During this testing, the Applicant will stop work if Basin Plan criteria are exceeded or observations indicate an exceedance of a water quality objective.

The Applicant will conduct turbidity testing during in-water work, stopping work if Basin Plan criteria are exceeded or observations indicate an exceedance of a water quality objective.

All temporary affected areas will be restored to pre-construction contours and conditions upon completion of construction activities to provide 1:1 mitigation for temporary impacts.

Excavation/Fill Area: Approximately 3,600 linear feet of pipeline will be removed from 0.44 acre of stream channel, riparian, and wetland habitats (waters of the United States). The area will be restored to natural pre-pipeline installation conditions using natural hydroseeding to restore the loss in riparian habitat.

Dredge Volume: None

California Integrated Water Quality System Impact Data: The Project will temporarily impact 0.02 acre of stream channel habitat, 0.20 acre of riparian habitat, and 0.22 acre of wetland habitat from fill and excavation activities.

Table 2: Total Project Fill/Excavation Temporary Impact⁵ Quantity

Aquatic Resource Type	Acres	Cubic Yards	Linear Feet
Riparian	0.20	1,302	
Stream Channel	0.02	214	
Wetland	0.22	1,713	

United States Army Corps of Engineers Permit Type: Nationwide Permit #12

California Department of Fish and Wildlife Lake or Streambed Alteration Agreement: The Applicant applied for a Lake or Streambed Alteration Agreement.

Possible Listed Species: Central California Valley DPS steelhead, Central Valley fall-run chinook salmon, Central Valley spring-run chinook salmon, and Swainson's hawk.

Status of CEQA Compliance: Pacific Gas and Electric approved a Mitigated Negative Declaration on 23 June 2020. Pacific Gas and Electric filed a Notice of Determination with the State Clearinghouse on 24 June 2020 (SCH No. 2020040266).

The Central Valley Water Board will file a Notice of Determination with the State Clearinghouse as a responsible agency within five (5) days of the date of this Certification.

⁵ Includes only temporary direct impacts to waters of the state and does not include area of temporary disturbance which could result in a discharge to waters of the state. Temporary impacts, by definition, are restored to pre-project conditions and therefore do not include a physical loss of area or degradation of ecological condition.

Compensatory Mitigation: The Central Valley Water Board is not requiring compensatory mitigation for Project activities because impacts to waters of the United States are temporary.

Application Fee Provided: \$1,949.00 was received on 20 August 2020. The fee amount was determined as required by California Code of Regulations, title 23, sections 3833(b)(3) and 2200(a)(3) and was calculated as category A - Fill & Excavation Discharges (fee code 84) with the dredge and fill fee calculator.

DISTRIBUTION LIST

Zachary Fancher
United States Army Corps of Engineers
Sacramento District Headquarters
Regulatory Division
SPKRegulatoryMailbox@usace.army.mil

Monica Gutierrez
National Marine Fisheries
Monica.Gutierrez@noaa.gov


Department of Fish and Wildlife, Region 4
R4LSA@wildlife.ca.gov

Stephanie Tadlock
Unit Supervisor
Central Valley Regional Water Quality Control Board, Sacramento Office
Stephanie.Tadlock@waterboards.ca.gov

Bill Jennings
CA Sportfishing Protection Alliance
DeltaKeep@aol.com


CWA Section 401 WQC Program
Division of Water Quality
State Water Resources Control Board
Stateboard401@waterboards.ca.gov

Sam Ziegler
United States Environmental Protection Agency
Ziegler.Sam@epa.gov

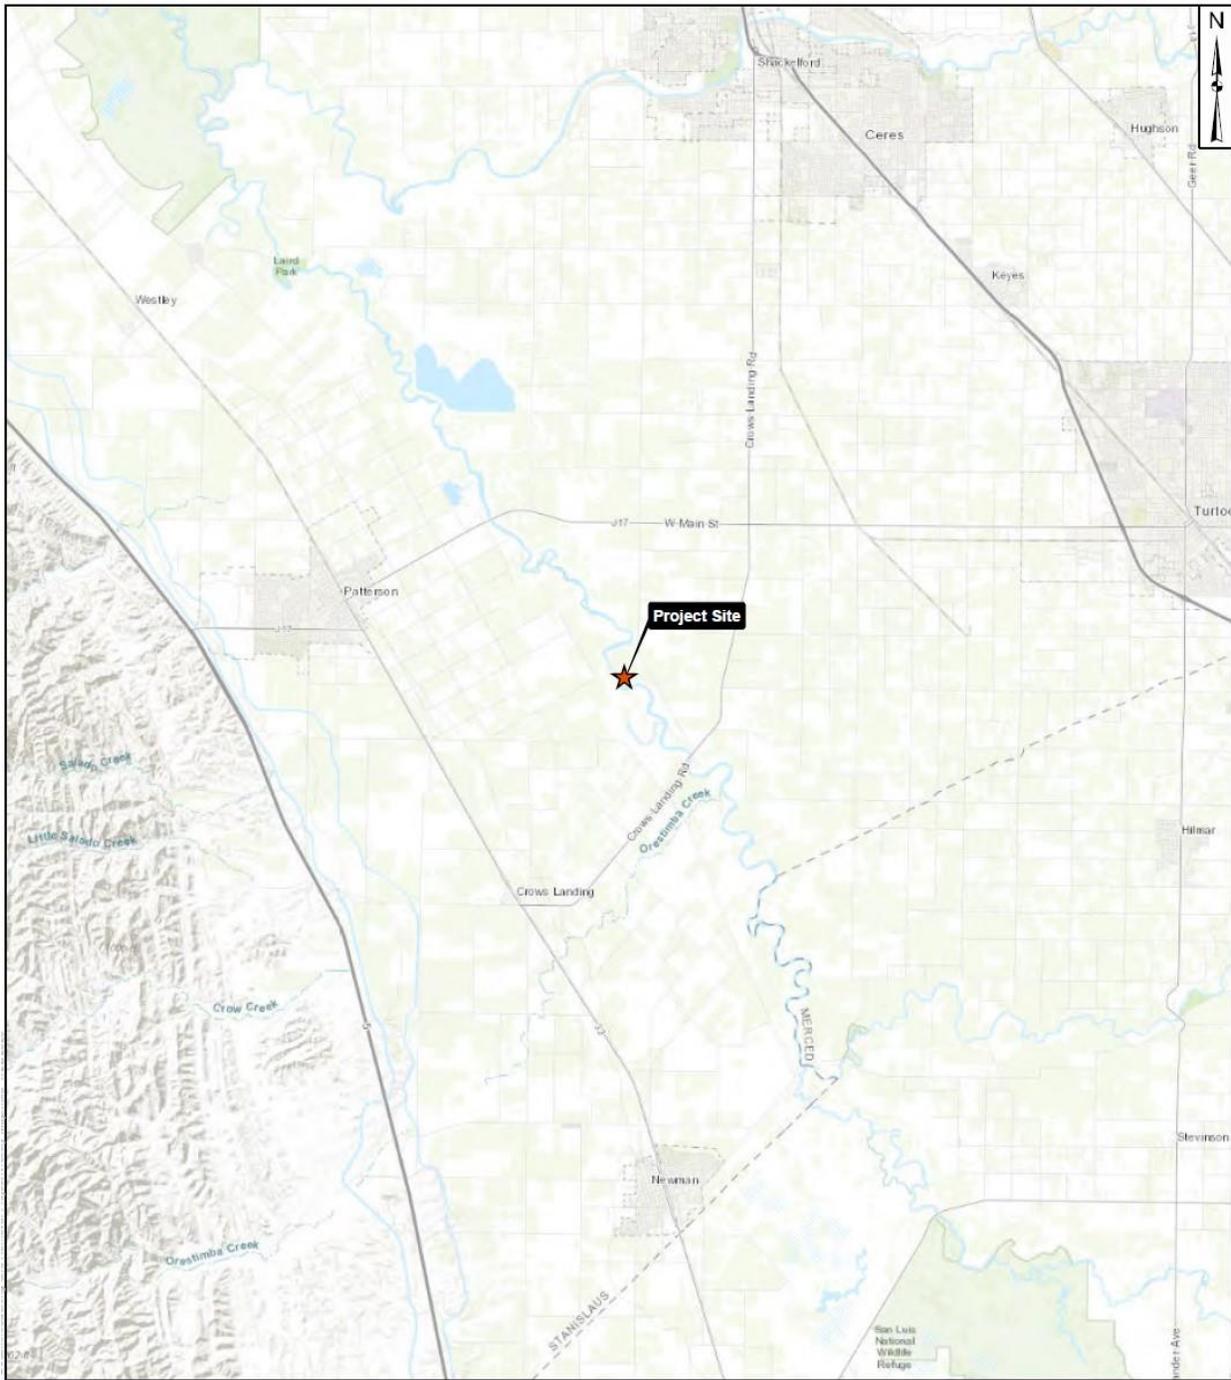

LEGEND:

★ Project Site Location



Source: Esri Online Topo Basemap
 Coordinate System: NAD 1983 StatePlane California III FIPS 0403 Feet
 Notes: This map was created for informational and display purposes only.


 <p>padre associates, inc. <small>ENGINEERS, GEOLOGISTS & ENVIRONMENTAL SCIENTISTS</small></p>	PROJECT NAME: PG&E R-687 L-215 SAN JOAQUIN RIVER CROSSING REPLACEMENT PROJECT, PHASE 2 STANISLAUS COUNTY, CA	<h1>VICINITY MAP</h1>	FIGURE 1
	PROJECT NUMBER: 1902-3511		



R-687 Federal Jurisdiction Temporary Impacts			
Feature ID	Description	Area (ft ²)	Acreage
	Lower Perennial Riverine Water	43,968.38	1.01
W1	Palustrine Emergent Wetland	4,625.38	0.11
W2	Palustrine Forested Wetland	60,420.89	1.39
W3	Palustrine Scrub-Shrub Wetland	31,330.45	0.72
W4	Palustrine Scrub-Shrub Wetland	45,349.01	1.04
W5	Palustrine Forested Wetland	1,176.53	0.03
W6	Palustrine Forested Wetland	3,103.44	0.07
Total Temporary Impact		189,974.09	4.36

LEGEND:

- Existing Pipeline to Remain as Customer Connection
- Existing Pipeline to be Decommissioned (Phase One)
- Replacement Pipeline Crossing (Phase One)
- Existing Pipeline to be Decommissioned (Phase Two)
- Horizontal Directional Drilling Work Area (Phase One)



Source: Esri Online Imagery Basemap, Startec 2019, Longitude 123 2020
 Coordinate System: NAD 1983 StatePlane California III FIPS 0403 Feet
 Notes: This map was created for informational and display purposes only.



PROJECT NAME:
 PG&E R-687 L-215 SAN JOAQUIN RIVER
 CROSSING REPLACEMENT PROJECT, PHASE 2
 STANISLAUS COUNTY, CA
 PROJECT NUMBER:
 1902-3511
 DATE:
 August 2020

PROJECT OVERVIEW

FIGURE
2